


## EVERBUILD 203 ACCELERATOR & FROSTPROOFER

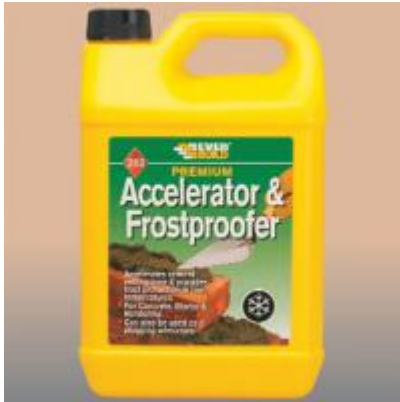

Colour	Product Code	Pack Size	Box Qty
Clear	ACC5L	5Ltr	4
	ACCE25L	25Ltr	1

### Product Description

EVERBUILD ACCELERATOR AND FROSTPROOFER is a chloride free liquid admixture for set acceleration and rapid hardening of cement based mortar, concrete, screeding and render. Also provides frost protection in the wet mortar during the setting period; even in sub-zero temperatures (down to  $-8^{\circ}\text{C}$ ). May also be used neat with cement as a plugging aid. Accelerator and Frostproofers is non-corrosive to metals so may be used with brick ties. Conforms to EN934-2 Table 7.

### Benefits

- Faster finishing times even in cold weather.
- Provides frost protection down to  $-8^{\circ}\text{C}$  in wet mortar.
- Chloride free non corrosive formula.
- Optimises mould usage.

### Areas For Use

- Mortars.
- Floor screeds
- External/Internal cement based rendering
- Concrete (not structural)
- Suitable for use as an emergency repair plugging aid when mixed neat with cement.

### Limitations

- Do not overdose.
- Do not use weak mixes during cold weather.
- Do not mix with other additives in same gauging water.
- Dispose of this product and packaging correctly. Do not allow to enter watercourses.
- It is the user's responsibility to determine suitability for use. If in doubt, please contact Technical Services Department for further advice.

### Application

Work should be carried out in accordance with the methods outlined in the Code of Practice BS5628 Part 3 for protection and use of mortars at low temperatures. All materials used must be free from ice and the temperature of the mix prior to placing must not be less than  $4^{\circ}\text{C}$ .

AS AN ACCELERATOR: Add to gauging water at an addition rate of 2.5 to 5 litres per 50kg cement depending on the degree of acceleration required. Note: remember to reduce required quantity of water accordingly.

AS A FROSTPROOFER: Add to gauging water at an addition rate of use 2.5ltrs/50kg cement for protection down to -4°C and 5ltrs/50kg cement for protection down to -8°C, again, reducing required quantity of water accordingly.

AS A PLUGGING AID: Mix neat with fresh cement and place immediately.

NOTE: Concrete must be covered after placing until the minimum strength is obtained or until the temperature rises above freezing. Do not use with high alumina cement. Following is an indication of setting times at 20°C (use as a guide only)

Use	Mix Design	Addition Rate / 50kg Setting Cement	Time (Approx)
Plugging Aid	Neat Fresh OPC		2-3mins
Concrete	1:2:4	2.5Ltr 5Ltr	7 Hours 2.5 Hours
Floor Screeds	1:3	2.5Ltr 5Ltr	6 Hours 2 Hours

#### Specific Data

Appearance	Clear liquid
Specific Gravity @ 20°C	1.2 Approx
pH	9 – 11
Dosage (as frostproofers)	Ambient temperatures down to -4°C : 2.5Ltrs per 50Kg cement Ambient temperatures down to -8°C : 5Ltrs per 50Kg cement

#### Health & Safety

Consult MSDS for full list of hazards.

#### Storage

Store in original unopened containers between 5 and 40°C.

#### Shelf Life

36 months from date of manufacture in original unopened containers.

*The technical data contained herein is based on our present knowledge and experience and we cannot be held liable for any errors, inaccuracies, omissions or editorial failings that result from technological changes or research between the date of issue of this document and the date the product is acquired. Before using the product, the user should carry out any necessary tests in order to ensure that the product is suitable for the intended application. Moreover, all users should contact the seller or the manufacturer of the product for additional technical information concerning its use if they think that the information in their possession needs to be clarified in any way, whether for normal use or a specific application of our product. Our guarantee applies within the context of the statutory regulations and provisions in force, current professional standards and in accordance with the stipulations set out in our general sales conditions. The information detailed in the present technical data sheet is given by way of indication and is not exhaustive. The same applies to any information provided verbally by telephone to any prospective or existing customer.*